


CT Series

FLOOR COATING SYSTEMS



Polyaspartic Premium Light Sprinkle System

- ① Prepared Concrete
- ② 100% Solids Epoxy
- ③ Polyaspartic with Acrylic Flake Sprinkle

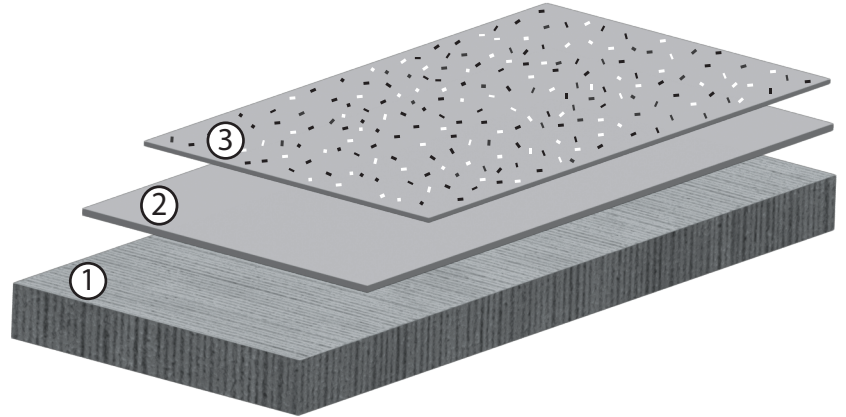

System Description:

The Polyaspartic Premium Light Sprinkle System consists of a base coat of pigmented epoxy followed by a top coat of pigmented polyaspartic. 1/8" decorative acrylic flakes are then sprinkled into the top coat. This system is formulated for use in garages, automobile showrooms, storage sheds, craft rooms, and more!

System Advantages:

- Quick turnaround/return to service
- Hides dirt and debris
- Low odor
- Color and UV stable
- Utilizes Sherwin Williams industrial products
- 10 year warranty



System Installation Overview:

1. Saw cuts, divots, pits, and small defects in concrete to be patched and filled with flex paste.
2. Apply a layer of pigmented Sherwin Williams 100% Solids Epoxy at 15 mils.
3. Apply a top coat of pigmented Sherwin Williams Polyaspartic at 8 mils with a sprinkling of acrylic flakes.

Concrete
Protection

Industrial
Toughness

Customer
Committed

480-203-2444
info@brilliantaz.com
www.brilliantaz.com
ROC#323537