


CT Series

FLOOR COATING SYSTEMS



Mosaic Metallic System

- ① Prepared Concrete
- ② 100% Solids Epoxy
- ③ 100% Solids UV Epoxy with Metallic Powders
- ④ Urethane with DiamondWear or GlossGrip

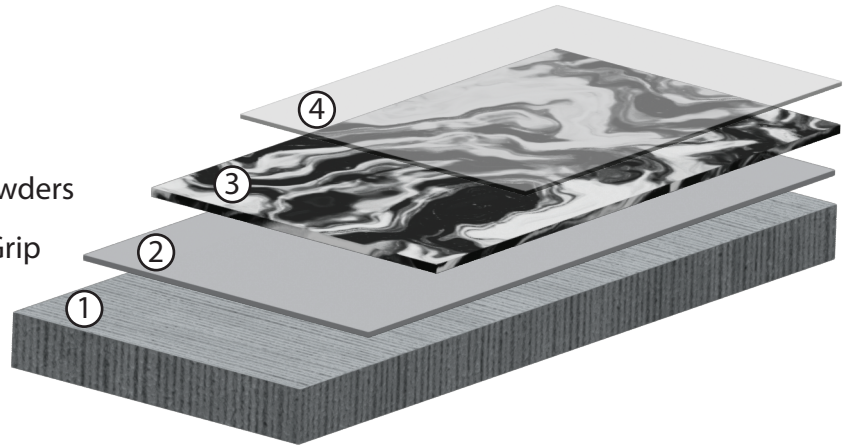

System Description:

The Mosaic Metallic System is a high-performance thin mil system consisting of a pigmented epoxy base layer. Metallic powders are then mixed into a clear UV epoxy which is poured and swirled onto the pigmented epoxy and left to cure. The system is then top coated with a high performance urethane with a DiamondWear or GlossGrip additive for added protection. This system is formulated for use in garages, automobile showrooms, storage sheds, craft rooms, home interiors, and more!

System Advantages:

- Wear resistant
- Customizable
- Highly chemical resistant
- Low odor
- Decorative
- Utilizes Sherwin Williams industrial products
- 15 year warranty



System Installation Overview:

1. Saw cuts, divots, pits, and small defects in concrete to be patched and filled with flex paste.
2. Apply a layer of pigmented Sherwin Williams 100% Solids Epoxy at 10 mils.
3. Apply a layer of Sherwin Williams UV Epoxy with metallic powders at 23 mils.
4. Apply a top coat of Urethane with DiamondWear or GlossGrip additive at 5 mils.

Concrete
Protection

Industrial
Toughness

Customer
Committed

480-203-2444
info@brilliantaz.com
www.brilliantaz.com
ROC#323537